


Door Lever Sets - 55 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

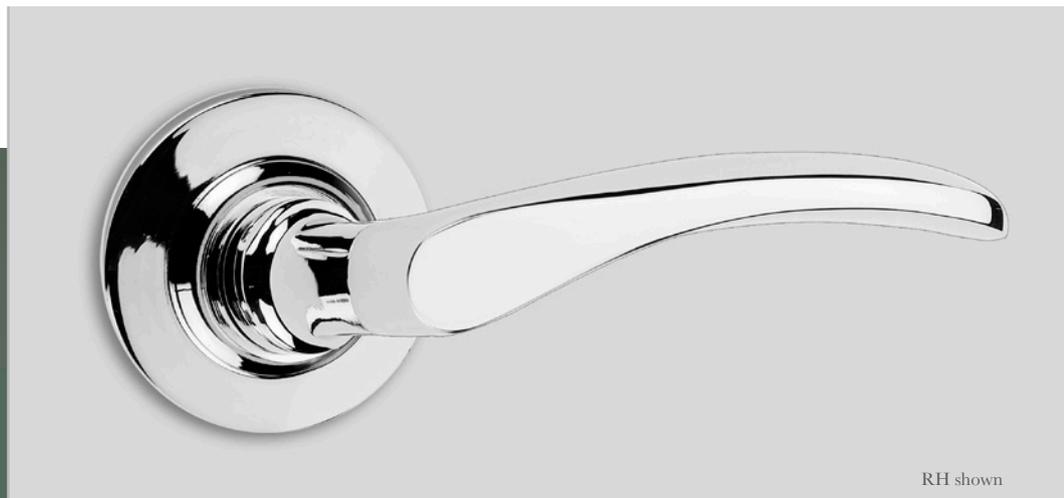


RH shown

▲ 5512




▲ 5516



▲ 5510



▲ 5531-9

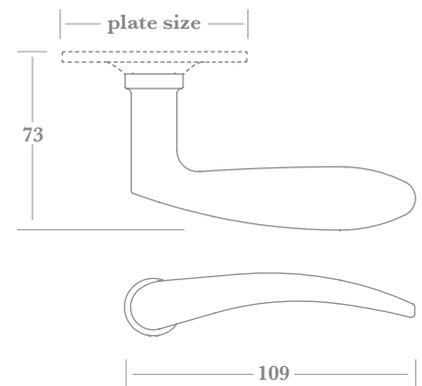


Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5512 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).


Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

	5510	5512	5516	5521-9	5531-9
Plate Size	Ø 51	Ø 54	102 x 41	152 x 41	220 x 41



▲ 5521/5531
latch/passage



▲ 5522/5532
keyhole




▲ 5523/5533
keyhole with cover



▲ 5524/5534
oval cylinder



▲ 5525/5535
euro cylinder



▲ 5527/5537
privacy turn



▲ 5528/5538
privacy turn



▲ 5529/5539
privacy turn



▲ standard release
supplied with
privacy sets




▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 54 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

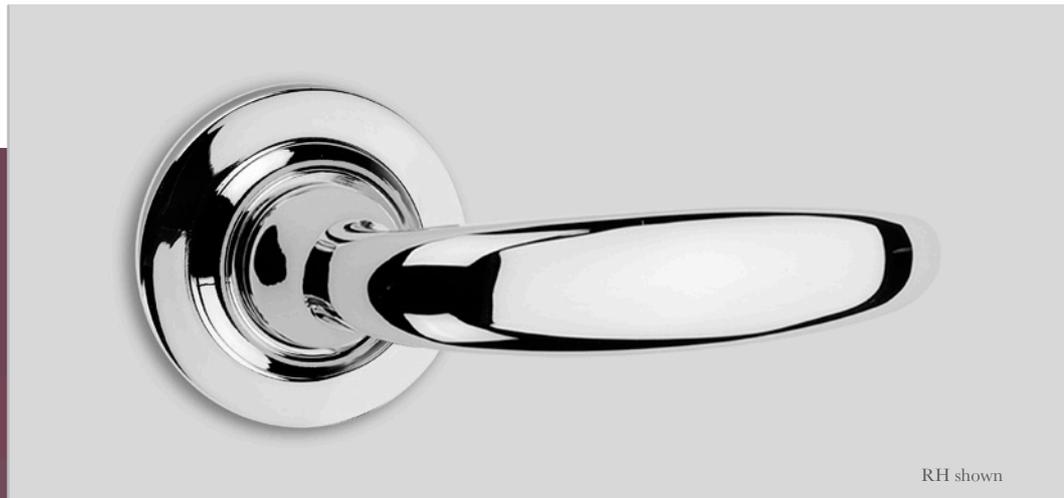

RH shown

▲ 5412



▲ 5416




▲ 5421-9



▲ 5410



▲ 5431-9

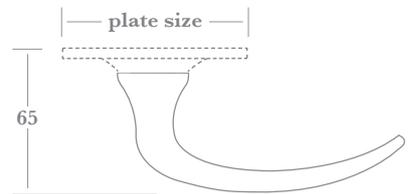

	5410	5412	5416	5421-9	5431-9
Plate Size	Ø 51	Ø 54	102 x 41	152 x 41	220 x 41



Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5412 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.


NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

▲ 5421/5431 latch/passage	▲ 5422/5432 keyhole	▲ 5423/5433 keyhole with cover	▲ 5424/5434 oval cylinder	▲ 5425/5435 euro cylinder
▲ 5427/5437 privacy turn	▲ 5428/5438 privacy turn	▲ 5429/5439 privacy turn	▲ standard release supplied with privacy sets	▲ release with indication (* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 52 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

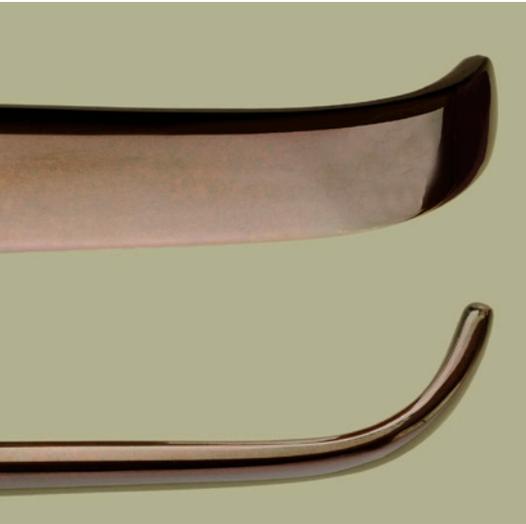

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5222 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.



RH shown

▲ 5222



▲ 5246





▲ 5251-9




▲ 5220




▲ 5261-9

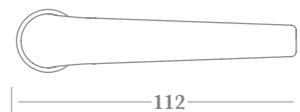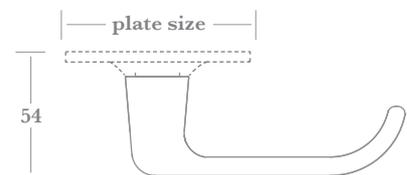

	5220	5222	5246	5251-9	5261-9
Plate Size	Ø 51	Ø 54	102 x 41	152 x 41	220 x 41



▲ 5251/5261
latch/passage



▲ 5252/5262
keyhole



▲ 5253/5263
keyhole with cover



▲ 5254/5264
oval cylinder



▲ 5255/5265
euro cylinder



▲ 5257/5267
privacy turn



▲ 5258/5268
privacy turn



▲ 5259/5269
privacy turn



▲ standard release
supplied with
privacy sets




▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 53 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

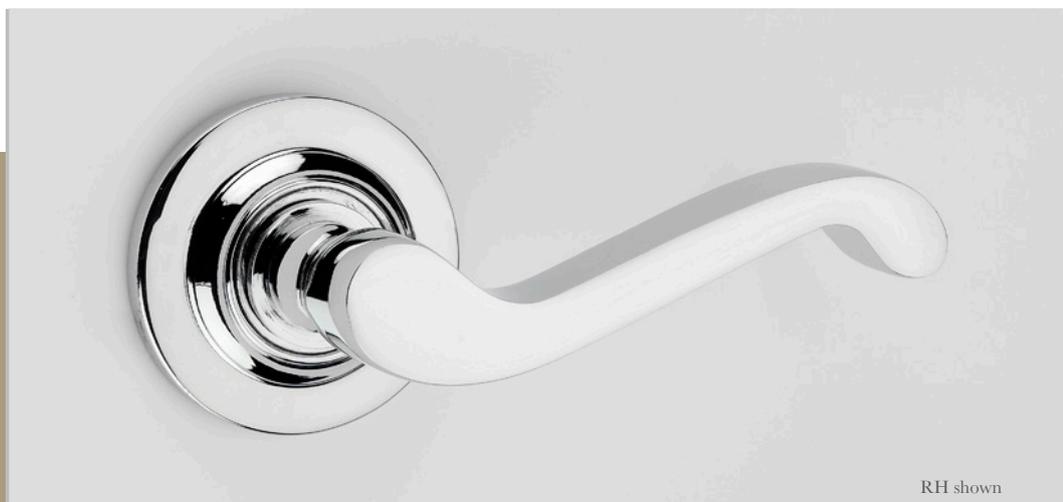

RH shown

▲ 5332





▲ 5331



▲ 5336



▲ 5341-9

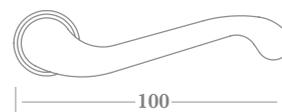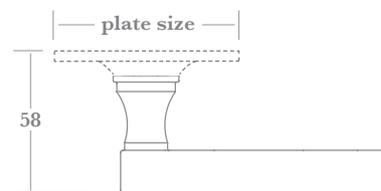

	5331	5332	5336	5341-9	5351-9
Plate Size	Ø 51	Ø 54	102 x 40	175 x 40	230 x 40

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5332 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

 Microtite, Fixed Dead and Unsprung options available - see page DF1:210

				
▲ 5341/5351 latch/passage	▲ 5342/5352 keyhole	▲ 5343/5353 keyhole with cover	▲ 5344/5354 oval cylinder	▲ 5345/5355 euro cylinder
				
▲ 5347/5357 privacy turn	▲ 5348/5358 privacy turn	▲ 5349/5359 privacy turn	▲ standard release supplied with privacy sets	▲ release with indication (* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied


Door Lever Sets - 53 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



RH shown

▲ 5362

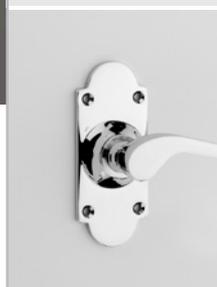


▲ 5361



▲ 5366



▲ 5381-9

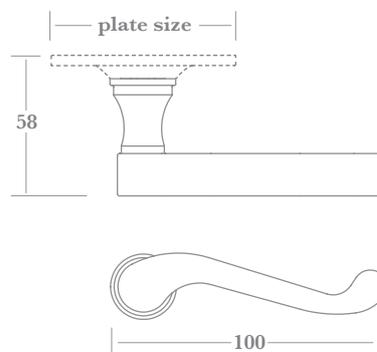

	5361	5362	5366	5371-9	5381-9
Plate Size	Ø 51	Ø 54	102 x 40	175 x 40	230 x 40



Microtite, Fixed Dead and Unsprung options available - see page DF1:210


Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5362 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).


Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.


▲ 5371-9

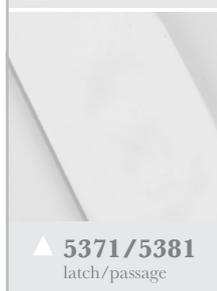

▲ 5371/5381
latch/passage

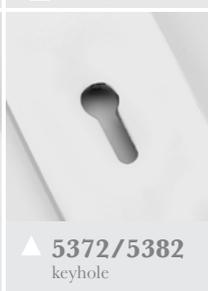


▲ 5372/5382
keyhole

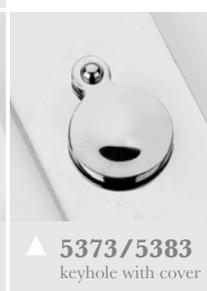


▲ 5373/5383
keyhole with cover



▲ 5374/5384
oval cylinder

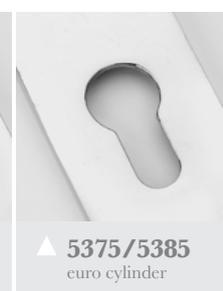

▲ 5375/5385
euro cylinder



▲ 5377/5387
privacy turn



▲ 5378/5388
privacy turn



▲ 5379/5389
privacy turn



▲ standard release
supplied with
privacy sets




▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 17 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

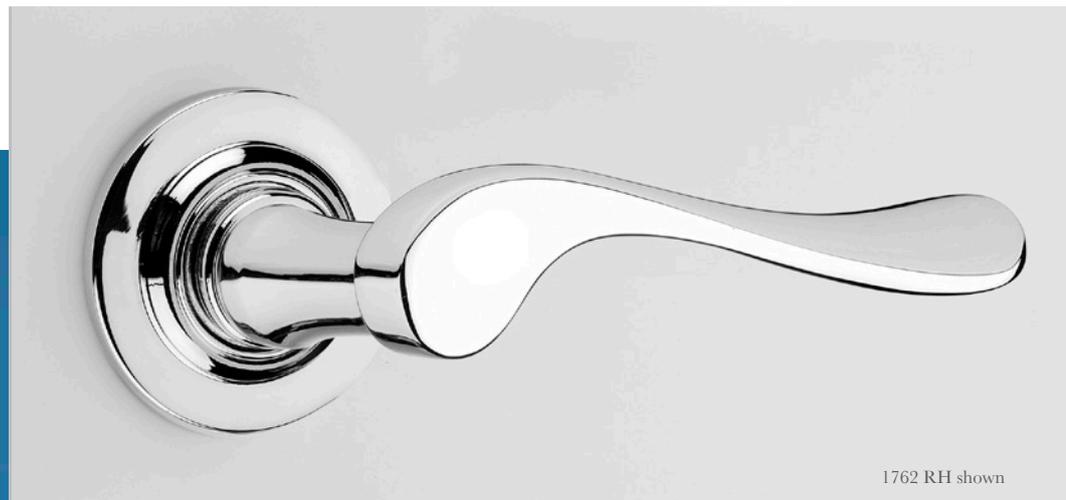

1762 RH shown

▲ 1762/1763 (light design - single lever 230g)




▲ 1760/1761†




▲ 1766



▲ 1771-9

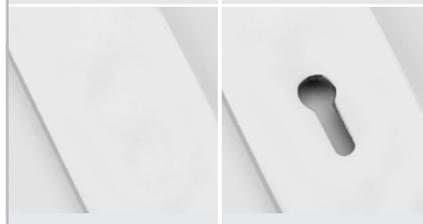

▲ 1781-9

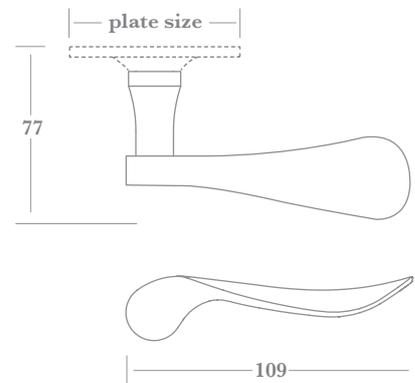

	1760	1761	1762	1763	1766	1771-9	1781-9
Plate Size	Ø 60	Ø 51†	Ø 54	Ø 60	102 x 41	152 x 41	220 x 41

† Ø51 rose design has 4 screw holes



Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 1762 & 1763 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.



▲ 1771/1781
latch/passage



▲ 1772/1782
keyhole



▲ 1773/1783
keyhole with cover



▲ 1774/1784
oval cutout



▲ 1775/1785
euro cutout



▲ 1777/1787
privacy turn



▲ 1778/1788
privacy turn

privacy turns & releases supplied loose for on-site handing - assembly tool supplied



▲ 1779/1789
privacy turn



▲ standard release
supplied with
privacy sets



▲ release
with indication
(* see notes)

Door Lever Sets - 18 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



1803 RH shown

▲ **1802/1803** (heavy design - single lever 360g)




▲ **1800/1801+**



▲ **1806**



▲ **1821-9**

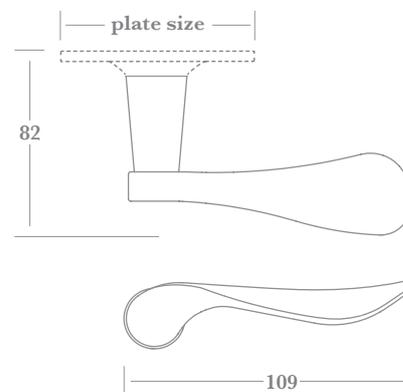

	1800	1801	1802	1803	1806	1811-9	1821-9
Plate Size	Ø 60	Ø 51†	Ø 54	Ø 60	102 x 41	152 x 41	220 x 41


† Ø 51 rose design has 4 screw holes




Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 1802 & 1803 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness). Alternative spindle lengths and functions are available - see page DF1:210.


NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

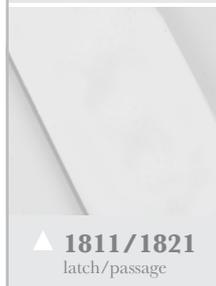

▲ **1811/1821**
latch/passage

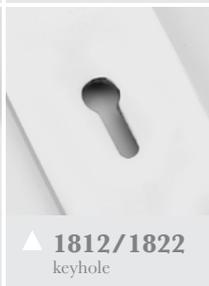

▲ **1812/1822**
keyhole

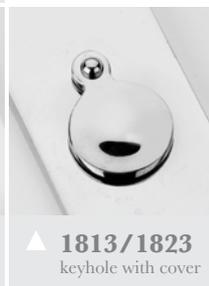

▲ **1813/1823**
keyhole with cover



▲ **1814/1824**
oval cylinder



▲ **1815/1825**
euro cylinder




▲ **1817/1827**
privacy turn



▲ **1818/1828**
privacy turn



▲ **1819/1829**
privacy turn



▲ standard release
supplied with
privacy sets



▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 16 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



1622 RH shown



▲ 1622/1623



▲ 1620/1621[†]



▲ 1631-9

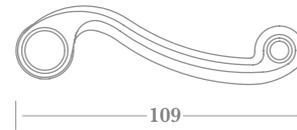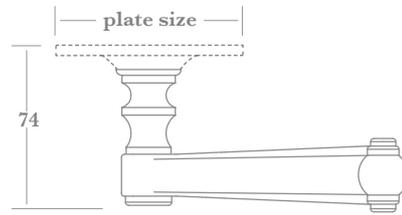

	1620	1621	1622	1623	1631-9
Plate Size	Ø 60	Ø 51 [†]	Ø 54	Ø 60	215 x 50

[†] Ø 51 rose design has 4 screw holes



Microtite, Fixed Dead and Unsprung options available - see page DF1:210

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 1622 & 1623 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

▲ 1631 latch/passage	▲ 1632 keyhole	▲ 1633 keyhole with cover	▲ 1634 oval cylinder	▲ 1635 euro cylinder
▲ 1637 privacy turn	▲ 1638 privacy turn	▲ 1639 privacy turn	▲ standard release supplied with privacy sets	▲ release with indication (* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 16 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



1642 RH shown



▲ 1642/1643



▲ 1640/1641†



▲ 1651-9

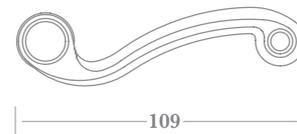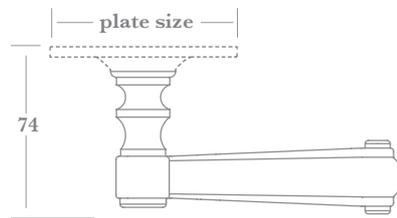

	1640	1641	1642	1643	1651-9
Plate Size	Ø 60	Ø 51†	Ø 54	Ø 60	215 x 50

† Ø51 rose design has 4 screw holes



Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 1642 & 1643 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness). Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

 ▲ 1651 latch/passage	 ▲ 1652 keyhole	 ▲ 1653 keyhole with cover	 ▲ 1654 oval cylinder	 ▲ 1655 euro cylinder
 ▲ 1657 privacy turn privacy turns & releases supplied loose for on-site handing - assembly tool supplied	 ▲ 1658 privacy turn	 ▲ 1659 privacy turn	 ▲ standard release supplied with privacy sets	 ▲ release with indication (* see notes)

Door Lever Sets - 15 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



RH shown

▲ 1502




▲ 1506



▲ 1501



▲ 1521-9

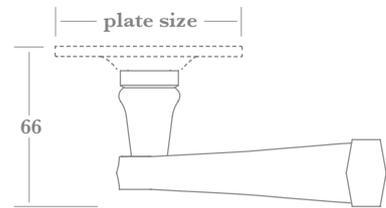

103


Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 1502 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.


	1501	1502	1506	1511-9	1521-9
Plate Size	Ø 51	Ø 54	102 x 40	175 x 40	230 x 40



▲ 1511/1521
latch/passage




▲ 1512/1522
keyhole



▲ 1513/1523
keyhole with cover



▲ 1514/1524
oval cylinder



▲ 1515/1525
euro cylinder



▲ 1517/1527
privacy turn



▲ 1518/1528
privacy turn



▲ 1519/1529
privacy turn



▲ standard release
supplied with
privacy sets



▲ release
with indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 15 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 1552 Concealed Fix Rosette - supplied with no.6 x 19m wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.




RH shown

▲ 1552



▲ 1551

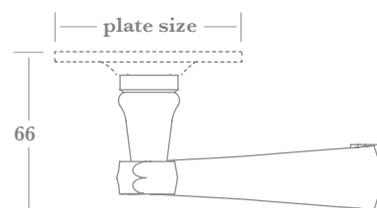

▲ 1556




▲ 1561-9



▲ 1571-9


	1551	1552	1556	1561-9	1571-9
Plate Size	Ø 51	Ø 54	102 x 40	175 x 40	230 x 40



▲ 1561/1571
latch/passage



▲ 1562/1572
keyhole



▲ 1563/1573
keyhole with cover



▲ 1564/1574
oval cylinder



▲ 1565/1575
euro cylinder




▲ 1567/1577
privacy turn



▲ 1568/1578
privacy turn



▲ 1569/1579
privacy turn



▲ standard release
supplied with
privacy sets



▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 44 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



4402 RH shown

▲ 4402/4403




▲ 4400/4401†



▲ 4406



▲ 4421-9

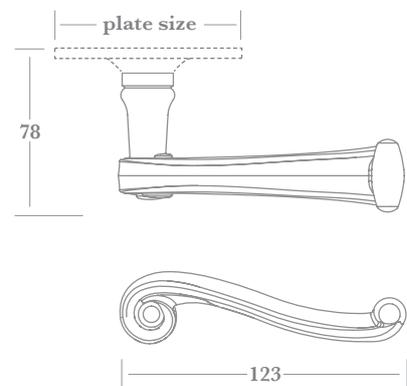

	4400	4401	4402	4403	4406	4411-9	4421-9
Plate Size	Ø 60	Ø 51†	Ø 54	Ø 60	102 x 40	175 x 40	230 x 40

† Ø 51 rose design has 4 screw holes




Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 4402 & 4403 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.


NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.



▲ 4411/4421
latch/passage




▲ 4412/4422
keyhole



▲ 4413/4423
keyhole with cover



▲ 4414/4424
oval cylinder



▲ 4415/4425
euro cylinder



▲ 4417/4427
privacy turn



▲ 4418/4428
privacy turn



▲ 4419/4429
privacy turn



▲ standard release
supplied with
privacy sets



▲ release
with indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 44 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



4452 RH shown

▲ 4452/4453

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 4452 & 4453 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.




▲ 4450/4451†

▲ 4456

▲ 4461-9

▲ 4471-9

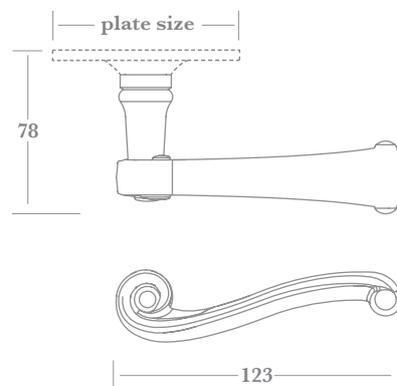

	4450	4451	4452	4453	4456	4461-9	4471-9
Plate Size	Ø 60	Ø 51†	Ø 54	Ø 60	102 x 40	175 x 40	230 x 40

† Ø 51 rose design has 4 screw holes



▲ 4461/4471
latch/passage

▲ 4462/4472
keyhole

▲ 4463/4473
keyhole with cover

▲ 4464/4474
oval cylinder

▲ 4465/4475
euro cylinder

▲ 4467/4477
privacy turn

▲ 4468/4478
privacy turn

▲ 4469/4479
privacy turn


▲ standard release
supplied with
privacy sets

▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied



Door Lever Sets - 90 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

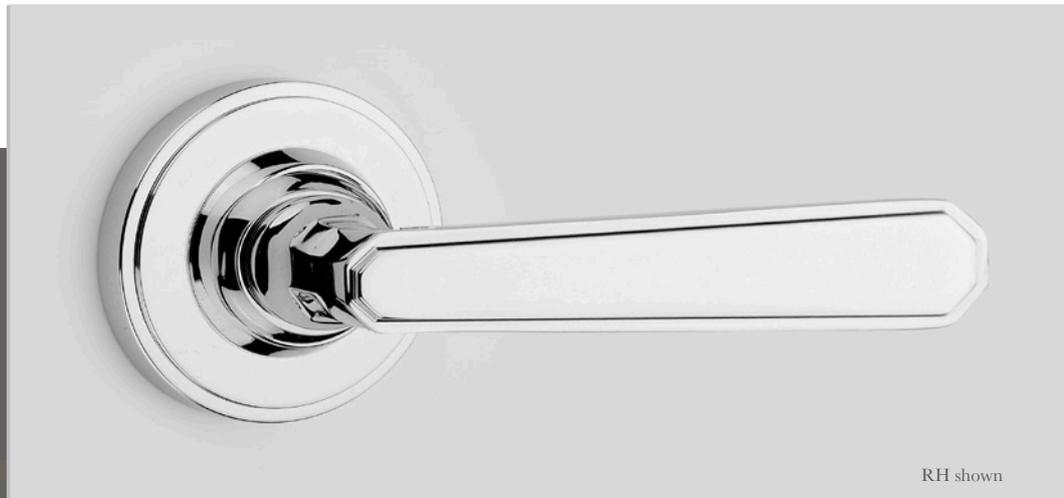

RH shown

▲ 9032

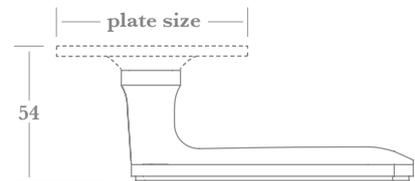

▲ 9031



	9031	9032	9021-7	9011-7
Plate Size	63 x 43	Ø 54†	150 x 50	200 x 50

†Ø 51 face fixed roses are available upon request



Microtite, Fixed Dead and Unsprung options available - see page DF1:210

Fixings


Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 9032 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

▲ 9021-7

▲ 9011-7



▲ 9011/9021
latch/passage

▲ 9012/9022
keyhole

▲ 9013/9023
keyhole with cover

▲ 9014/9024
oval cylinder

▲ 9015/9025
euro cylinder



▲ 9017/9027
privacy turn
privacy turns & releases supplied loose for on-site handing - assembly tool supplied

▲ standard release

▲ release with indication
(* see notes)


Door Lever Sets - 37 series

Spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.




RH shown

▲ 3711

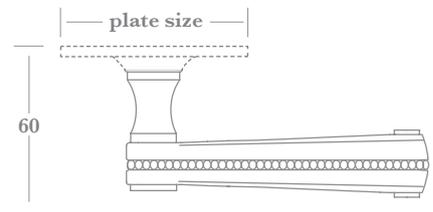

▲ 3741

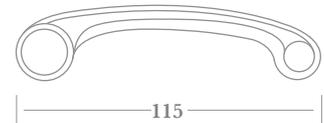


	3711	3741	3751-9	3761-9
Plate Size	Ø 60	100 x 50	150 x 50	280 x 50

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see DF1:210.



NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.



Microtite, Fixed Dead and Unsprung options available - see page DF1:210

▲ 3751-9

▲ 3761-9





▲ 3751/3761
latch/passage

▲ 3752/3762
keyhole

▲ 3753/3763
keyhole with cover

▲ 3754/3764
oval cylinder

▲ 3755/3765
euro cylinder



▲ 3757/3767
privacy turn

▲ 3758/3768
privacy turn

▲ 3759/3769
privacy turn


▲ standard release
supplied with
privacy sets

▲ release with
indication
(* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied


Door Lever Sets - 50 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

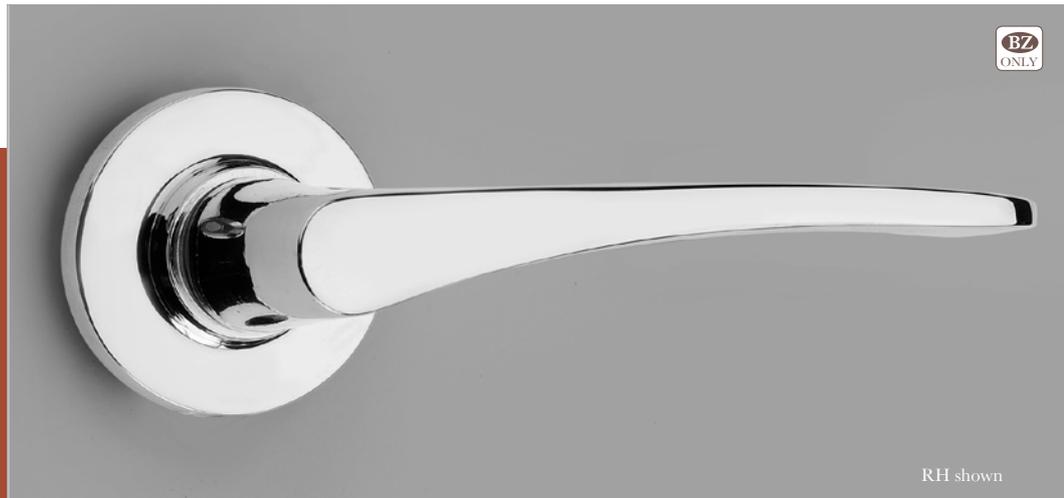

RH shown

▲ 5052

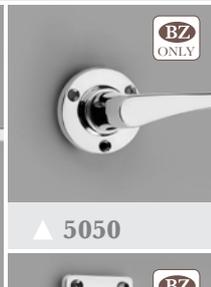



▲ 5050



▲ 5056



▲ 5091-9

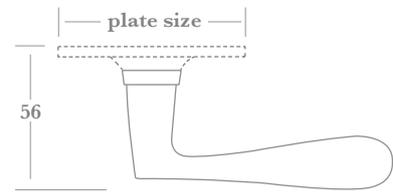

	5050	5052	5056	5061-9	5091-9
Plate Size	Ø 51	Ø 54	102 x 40	152 x 41	220 x 41



Microtite, Fixed Dead and Unsprung options available - see page DF1:210

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5052 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.


NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

 ▲ 5061/5091 latch/passage	 ▲ 5062/5092 keyhole	 ▲ 5063/5093 keyhole with cover	 ▲ 5064/5094 oval cylinder	 ▲ 5065/5095 euro cylinder
 ▲ 5068/5098 privacy turn	 ▲ 5069/5099 privacy turn	 ▲ standard release supplied with privacy sets	 ▲ release with indication (* see notes)	

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 46 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

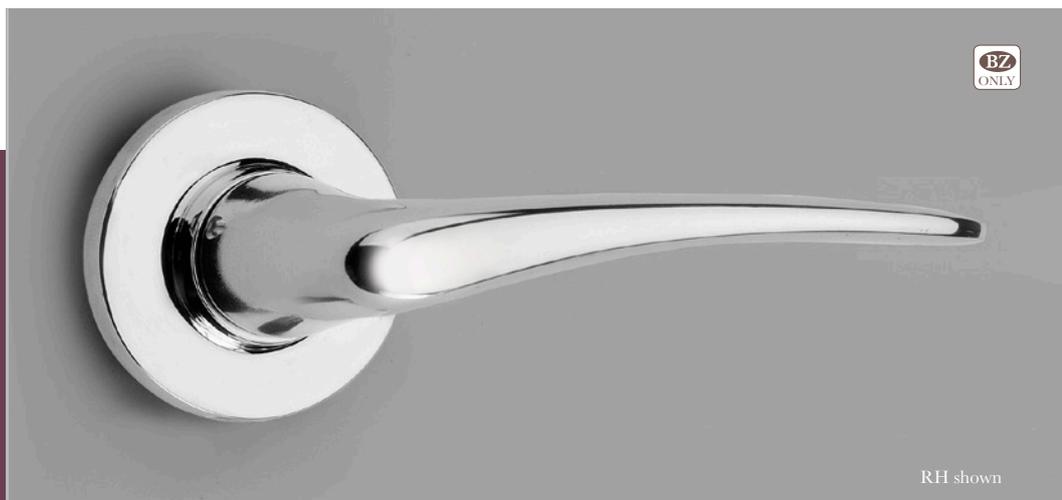

RH shown

▲ 4602




▲ 4600



▲ 4606



▲ 4621-9

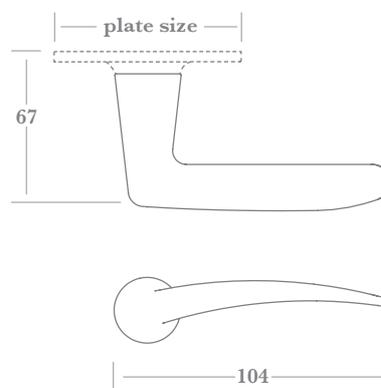

	4600	4602	4606	4611-9	4621-9
Plate Size	Ø 51	Ø 54	102 x 40	152 x 41	220 x 41

Microtite, Fixed Dead and Unsprung options available - see page DF1:210

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 4602 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

 ▲ 4611/4621 latch/passage	 ▲ 4612/4622 keyhole	 ▲ 4613/4623 keyhole with cover	 ▲ 4614/4624 oval cylinder	 ▲ 4615/4625 euro cylinder
 ▲ 4618/4628 privacy turn	 ▲ 4619/4629 privacy turn	 ▲ standard release supplied with privacy sets	 ▲ release with indication (* see notes)	

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 42 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.




RH shown

▲ 4202/4203



▲ 4200/4201

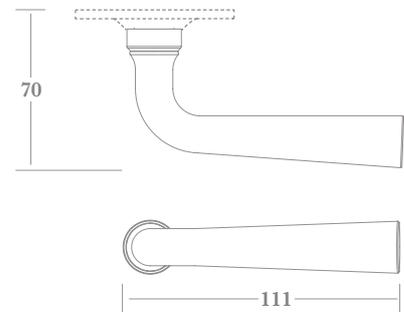

▲ 4206



▲ 4211-9

▲ 4221-9

	4200	4201	4202	4203	4206	4211-9	4221-9
Plate Size	Ø 51	Ø 60	Ø 54	Ø 60	102 x 41	152 x 41	220 x 41







Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 4202 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

 ▲ 4211/4221 latch/passage	 ▲ 4212/4222 keyhole	 ▲ 4213/4223 keyhole with cover	 ▲ 4214/4224 oval cylinder	 ▲ 4215/4225 euro cylinder
 ▲ 4217/4227 privacy turn	 ▲ 4218/4228 privacy turn	 ▲ 4219/4229 privacy turn	 ▲ standard release supplied with privacy sets	 ▲ release with indication (* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 57 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.



RH shown

▲ 5722



▲ 5746




▲ 5751-9



▲ 5720



▲ 5761-9

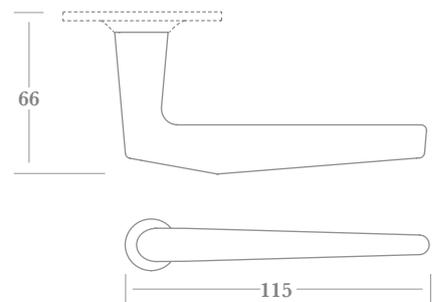

	5720	5722	5746	5751-9	5761-9
Plate Size	Ø 51	Ø 54	102 x 41	152 x 41	220 x 41


 Microtite, Fixed Dead and Unsprung options available - see page DF1:210

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 5722 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.



NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

				
▲ 5751/5761 latch/passage	▲ 5752/5762 keyhole	▲ 5753/5763 keyhole with cover	▲ 5754/5764 oval cylinder	▲ 5755/5765 euro cylinder
				
▲ 5757/5767 privacy turn	▲ 5758/5768 privacy turn	▲ 5759/5769 privacy turn	▲ standard release supplied with privacy sets	▲ release with indication (* see notes)

privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Sets - 61 series

Traditional spring loaded Door Lever Sets offered in Latch/Passage, Privacy, Keyhole and Profile Cylinder configurations.

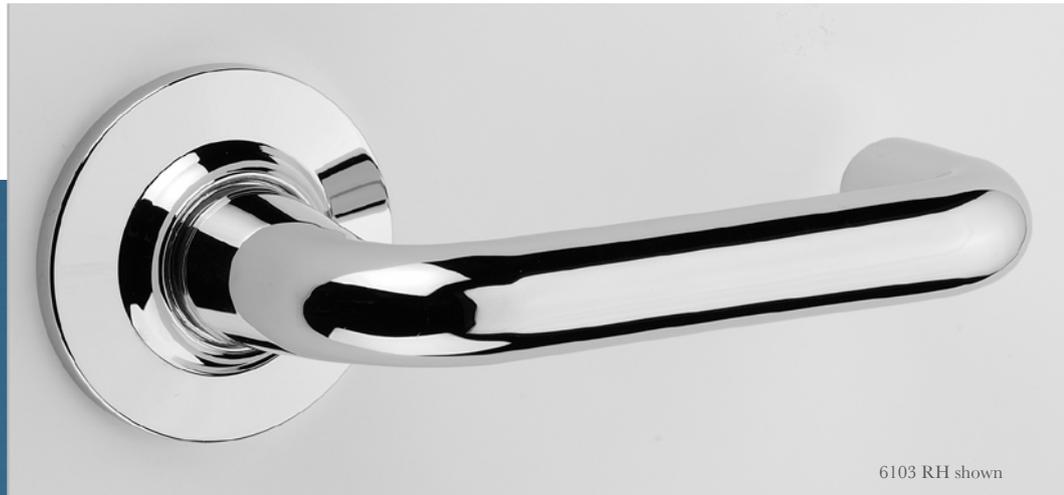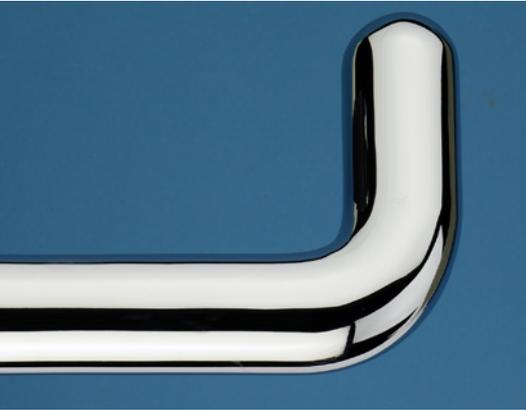

6103 RH shown

Fixings

Standard Lever Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws (except 6102 & 6103 Concealed Fix Rosette - supplied with no.6 x 19mm wood screws and M5 x 70mm machine screws for bolt through fixing - see page DF1:210); and an 8mm x 90mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF1:210.

NB. Microtite Spindle Option is recommended for hollow core doors or those with door controls and/or seals.

▲ 6102/6103




▲ 6100/6101+



▲ 6116



▲ 6131-9

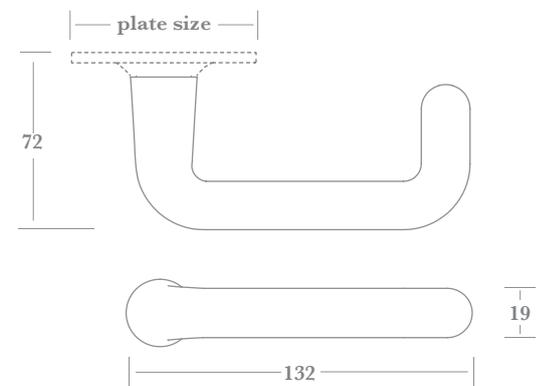

	6100	6101	6102	6103	6116	6121-9	6131-9
Plate Size	Ø 60	Ø 51†	Ø 54	Ø 60	102 x 41	152 x 41	220 x 41


† Ø 51 rose design has 4 screw holes



Microtite, Fixed Dead and Unsprung options available - see page DF1:210



▲ 6121-9



▲ 6131-9



▲ 6121/6131
latch/passage



▲ 6122/6132
keyhole




▲ 6123/6133
keyhole with cover



▲ 6124/6134
oval cylinder



▲ 6125/6135
euro cylinder



▲ 6127/6137
privacy turn



▲ 6128/6138
privacy turn



▲ 6129/6139
privacy turn



▲ standard release
supplied with
privacy sets



▲ release
with indication
(* see notes)


privacy turns & releases supplied loose for on-site handing - assembly tool supplied

Door Lever Options

Fixed Dead (Dummy) Option

As an alternative to using Taylors Spindles we can factory fix dead levers to plates and roses.

To order this option, add **FD** to code for half sets (e.g. 5521PB/RH/**FD**), or **FDS** for full sets (e.g. 5521PB/**FDS**).

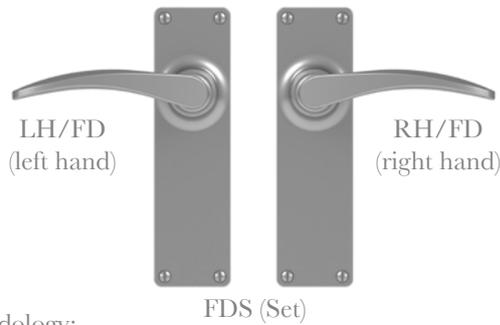


Methodology:

Plate adapted to prevent lever from rotating, then an M10 Clamping Bolt with threadlock secures lever in place.

Unsprung Option


All traditional Levers are available Unsprung, which will facilitate use with a multipoint lock mechanism. To order this option add **NSP** to code (e.g. 5535PC92/**NSP** for full sets & 5535PC92/LH/**NSP** for half sets).

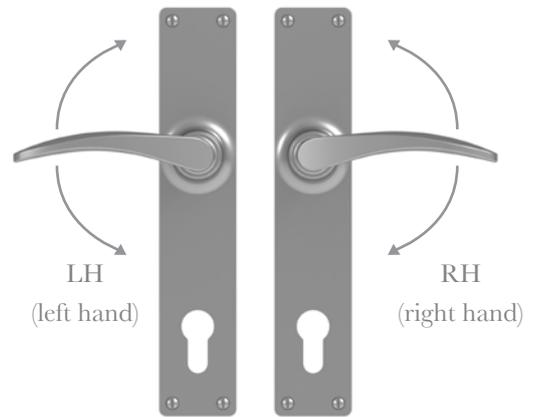

Microtite Option

- Recommended for hollow core doors or those fitted with a door control and/or seals.
- Unique sprung design.
- Infinitely adjustable for doors between 35mm and 65mm thick.
- All the pulling force is transferred through the spindle.
- No visible grubscrew.
- Split finish sets are available - please contact us for coding and pricing information.

To order this option add **MC** after primary code (e.g. 4478**MC**/PC72)

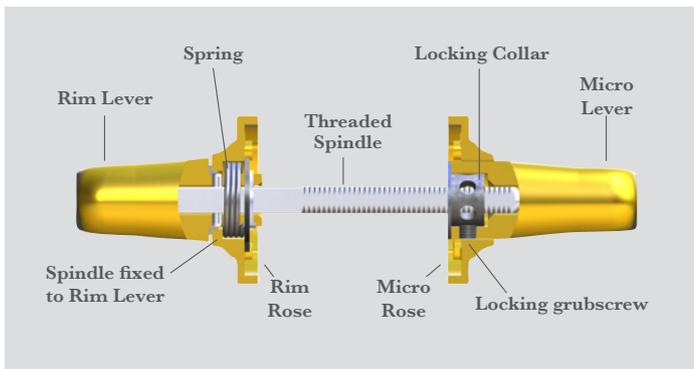


Concealed Fix Rosettes

All traditional Levers (section DF1) are available fitted to concealed fix, sprung loaded, rosettes.



These provide for woodscrew fixing and/or through bolt fixing using break-off machine screws at 38mm centres in a horizontal orientation.

Alternative orientations (eg. vertical) can be provided - please contact us for further information.

Fixings provided (all stainless steel) - 8pcs no.6 x 19mm wood screws & 2pcs M5 x 70mm break-off machine screws per set (screw pack also available separately - code 01/036).

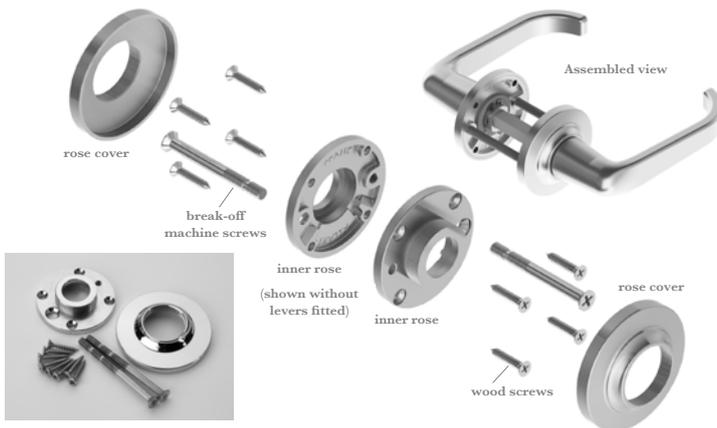


Spindle Options

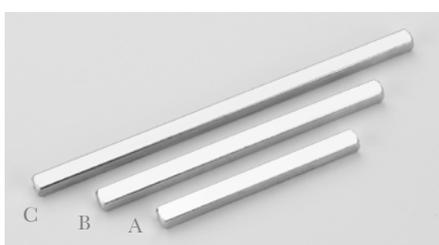

	A	B	C
L (length)	90	130	175

▲ **9005 Plain Spindle** (stainless steel)

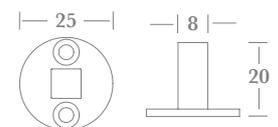

For fixed dead mounting of traditional knob & lever furniture (sections DF1 & DF2). Supplied with no.6 x 19mm wood screws.

▲ **9000 Taylors Spindle** (zinc plated steel)

Multipoint Lever Sets - 397 Series

An unsprung, Regency style, Door Lever Set, configured to work with both European and US Multipoint Locks. Alternative through-bolt positions are available upon request.



397M08/PC/3711/RH shown

Fixings

Supplied with M5 x 25mm finish matched slotted blind nuts, M5 allthreads and an 8mm x 110mm stainless steel lockpoint spindle with grub screws, all to suit doors up to 75mm thick.



▲ 397E

397M

397G/397P



LEVER & TURN OPTIONS





See section ST1 for Lever options





See pages ST6:020 & 030 for Turn options

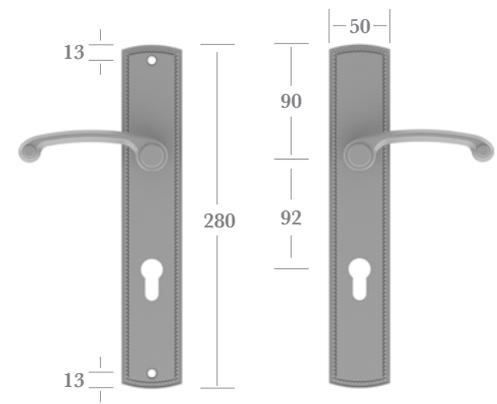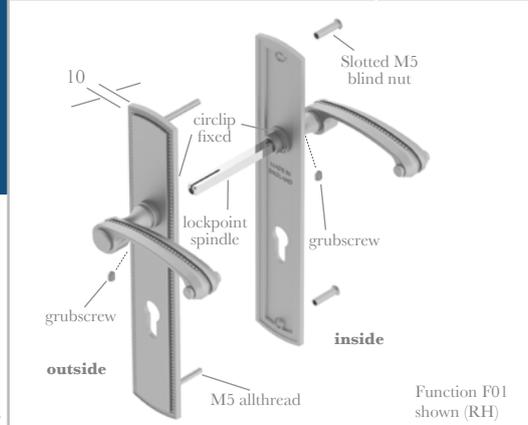

▲ 397E (Euro)

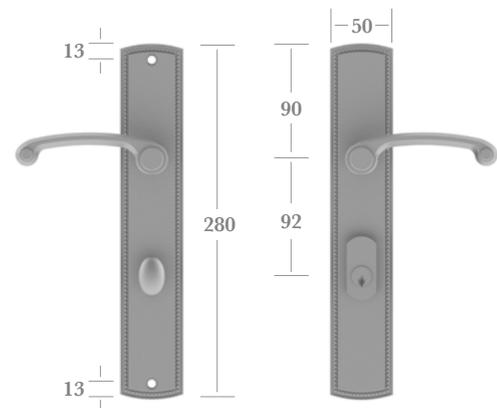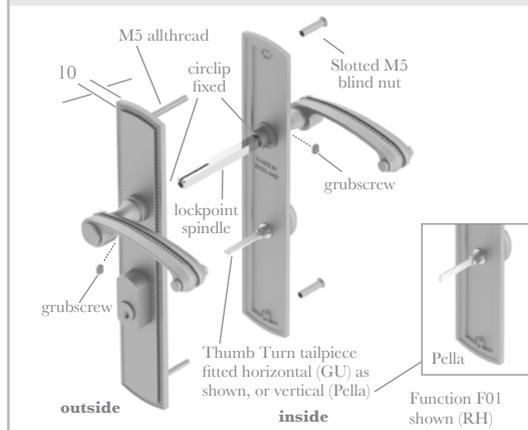

▲ 397G (GU) or 397P (Pella)

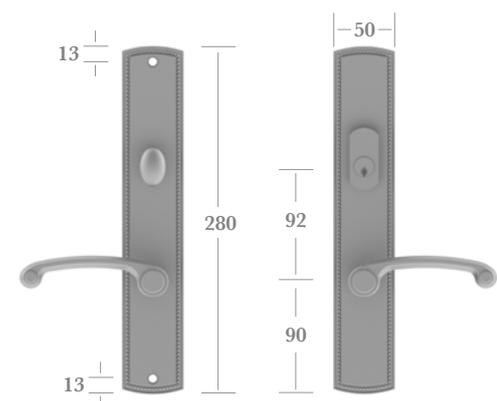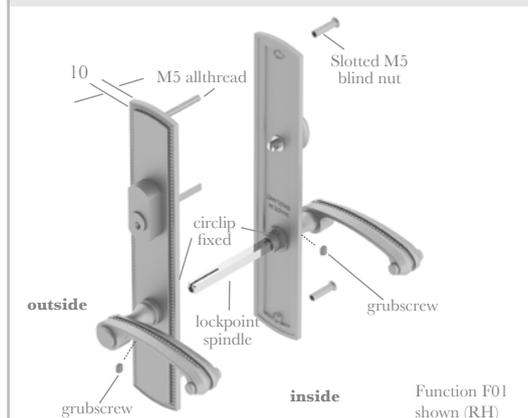

▲ 397M (Marvin)

Function Codes - 397 Series Multipoint Locks

Euro Locks	E01	E02	E03	E04	E05
Outside Plate	Lever & Euro Cutout	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Euro Cutout	Lever & Euro Cutout	Lever & Euro Cutout	Lever only	Lever only
	E06	E07	E08	E09	E10
Outside Plate	-	-	Lever & Euro Cutout	Lever only	Blank
Inside Plate	Lever & Euro Cutout	Lever only	-	-	-

Pella & GU Locks	P01 or G01	P02 or G02	P03 or G03	P04 or G04	P05 or G05
Outside Plate	Lever & Lock Block	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Thumb Turn	Lever & Thumb Turn	Lever & Thumb Turn	Lever only	Lever only
	P06 or G06	P07 or G07	P08 or G08	P09 or G09	P10 or G10
Outside Plate	-	-	Lever & Lock Block	Lever only	Blank
Inside Plate	Lever & Thumb Turn	Lever only	-	-	-

Marvin Locks	M01	M02	M03	M04	M05
Outside Plate	Lever & Lock Block	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Thumb Turn	Lever & Thumb Turn	Lever & Thumb Turn	Lever only	Lever only
	M06	M07	M08	M09	M10
Outside Plate	-	-	Lever & Lock Block	Lever only	Blank
Inside Plate	Lever & Thumb Turn	Lever only	-	-	-

(*) If functions 02 & 04 are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates (Function codes 06-10)

Door Lever Sets - Multipoint Locks

Two unsprung Multipoint Lock Plate Sets, both available with a choice of nine standard Lever designs. Each plate type is configured to work with different Lock through-bolt positions as illustrated. Alternative Levers and through-bolt positions are available upon request.



3006 shown with special order Lever fitted



LH Set shown with 5361 Levers & 92mm centres

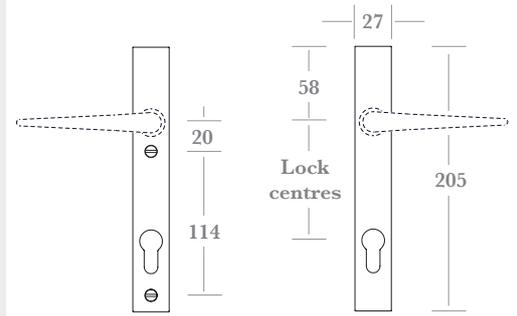


Plate thickness 10mm

▲ 3004



LH Set shown with 5720 Levers & 92mm centres


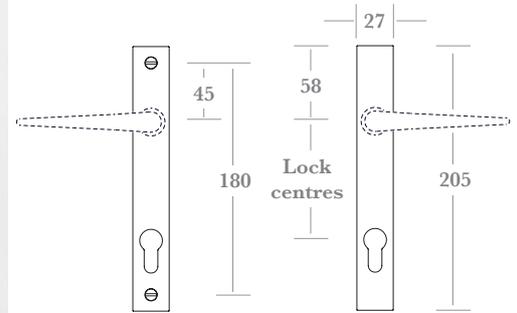


Plate thickness 10mm


▲ 3006

Fixings

Supplied with M5 x 25mm finish matched slotted blind nuts, M5 allthreads and an 8mm x 110mm stainless steel lockpoint spindle with grub screws, all to suit doors up to 75mm thick.

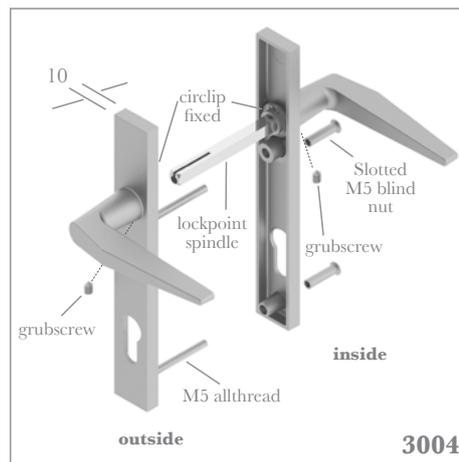

3004

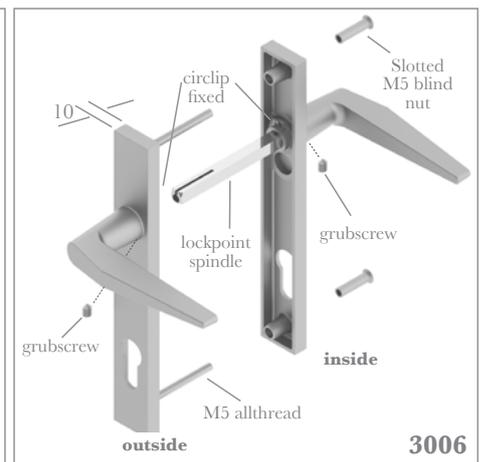

3006

LEVER CODES

1501	1551	5220	5331	5361
				Please refer to pages DF1:010 to 140 for dimensional information
5410	5510	5720	9031	

alternative Levers available upon request

Door Lever Set - 3R35 Locking Latch

Reversible sprung Door Lever Set designed to operate a Chubb/Union 3R35 Locking Latch. A large selection of alternative levers are available to order, please contact us to discuss availability.




Fixings

Plate supplied with finish matched no.6 x 25mm screws.

Escutcheon supplied with finish matched no.4 x 13mm screws.

▲ 1218

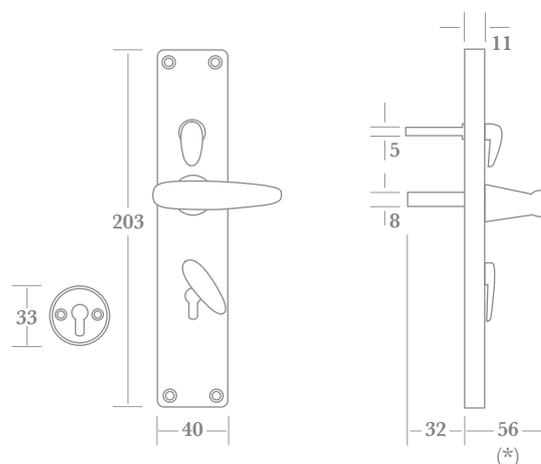

(* projection will vary if alternative lever specified



A large choice of alternative levers are available upon request.